

Calibration table Type ED-KT 300/400



Technical data - standard

Length of table approx.	mm	3.000/4.000
Working range (table height) measured from floor	mm	850-980
Power supply		3 x 400 V, 50 Hz + N + P
Number of vacuum pumps on demand	pieces	1 or 2
Drive power of vacuum pumps on demand	kW	2,2; 3,0; 4,0
Number of vacuum outlets on demand	pieces	8 or 16


Number of flow regulator outlets on demand	pieces	8 or 16
Motor driven longitudinal adjustment	mm	700
Width of rails	mm	600
Manual Side-to-side adjustment	mm	± 20
Net weight	kg	1.300/1.500
Sizes overall without rails L/W/H	mm	3.450/4.450 x 800 x 1.800
Length of rails	mm	4.500/5.500

Standard-calibration tables:

ED-KT 300 - 1 - 2.2 - 8	ED-KT 400 - 1 - 2.2 - 8
ED-KT 300 - 2 - 2.2 - 16	ED-KT 400 - 2 - 2.2 - 16
ED-KT 300 - 1 - 3.0 - 8	ED-KT 400 - 1 - 3.0 - 8
ED-KT 300 - 2 - 3.0 - 16	ED-KT 400 - 2 - 3.0 - 16
ED-KT 300 - 1 - 4.0 - 8	ED-KT 400 - 1 - 4.0 - 8
ED-KT 300 - 2 - 4.0 - 16	ED-KT 400 - 2 - 4.0 - 16

Type-Key for standard calibration tables

Example:

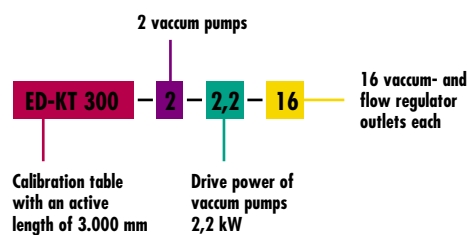

All data subject to change without notice in accordance with technical modifications!